

## Ground Rods



Bronze Ground Rod Clamp



Heavy Duty Bronze Ground Rod Clamp

### CLAMPS

| Item No.   | Mfg. Part No.       | Description                                 |
|------------|---------------------|---|
| 7260027500 | PT-12BCL            | 1/2-Inch Bronze Ground Rod Clamp            |
| 7260017500 | PT-38BLC (PT-CEB-0) | 3/8-Inch Bronze Ground Rod Clamp            |
| 7260517500 | PT-CP58             | 5/8-Inch Bronze Ground Rod Clamp (RUS)      |
| 7260037500 | PT-58BCL-H/HDC58R   | 5/8-Inch Heavy Duty Bronze Ground Rod Clamp |

## Bonding and Grounding Hardware



Ground Lug



KUL Bonding Clamp



Bronze Ground Pipe Clamp



I-Beam Clamp


### GROUNDING & BONDING CONNECTORS AND CLAMPS

| Item No.   | Mfg. Part No. | Description                            |
|------------|---------------|--|
| 0000406460 | PT-GL4-11     | Ground Lug with Slotted Hex Head Screw |
| 0000396858 | PT-2174       | KUL Bonding Clamp                      |
| 0000386289 | PT-5948       | Bronze Ground Pipe Clamp 0.5 - 1-Inch  |
| 7260097500 | PT-KP-2-IMP   | Bronze Ground Pipe Clamp 1.25 - 2-Inch |
| 0000386288 | PT-2145       | I-Beam Ground Clamp with Slot          |

600 New Century Parkway  
 New Century, Kansas 66031-8000  
 1.800.755.1950

[dependonpremier.com](http://dependonpremier.com)

# Bonding and Grounding Hardware

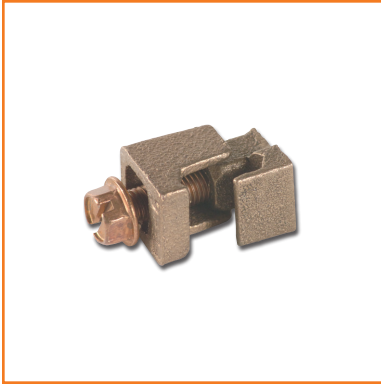


Bronze Vise Grip Connector



Tinned Bronze Vise Grip Connector

## WISE GRIP CONNECTORS

| Item No.   | Mfg. Part No. | Description  |
|------------|---------------|--|
| 0000403157 | PT-BVC-4      | Bronze Vise Grip Connector #4 to #8  |
| 0000381031 | PT-2170       | Bronze Vise Grip Connector #6 to #8  |
| 7211117500 | EVC167P       | Tinned Bronze Vise Grip Connector C167   0.146 to 0.312 messenger, 0.146 to 0.232 groundwire |

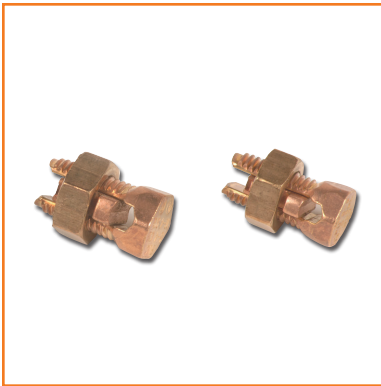

Copper Alloy Split Bolt



Tin Plated Split Bolt w/ spacer for 2 conductors

## SPLIT BOLTS

| Item No.   | Mfg. Part No. | Description  |
|------------|---------------|--|
| 0000381032 | PT-2002       | Copper Alloy Split Bolt S2 - 2H   #6 to #2 - 0.162 to 0.292                            |
| 0000381033 | PT-2004       | Copper Alloy Split Bolt S4 - 4H   #8 to #4 - 0.128 to 0.204                            |
| 0000386290 | PT-2006       | Copper Alloy Split Bolt S6 - 6H   #10 to #6 - 0.102 to 0.162                           |
| 0000403158 | PT-2004-3     | Copper Split Bolt SEL4 - 4H3   #8 to #4 - 0.128 to 0.204 (longer) - 2 or 3 conductors  |
| 7211087500 | PT-SEL-6      | Copper Split Bolt SEL6 - 6H3   #10 to #6 - 0.102 to 0.162 (longer) - 2 or 3 conductors |
| 7211057500 | PT-SW-6       | Tin Plated Split Bolt SW6 - 1HPS   #8 to #2 - 0.128 to 0.316                           |

## Bonding Braids



Bond Braid #6 with Eyelets and Web

### Bond Braid

Bond Braid is a flat woven braid composed of tinned-copper strands, used to make an electrical and mechanical bond across cable shield openings. It is available as a solid braid with eyelets, or with eyelets and webbing installed. The web cover is a poly-mesh plastic netting.



Bond Braid #6 with Eyelets

- Equivalent to No.6 AWG
- Individually tinned copper conductors
- 1/2 inch width
- Eyelets have 1/4 inch ID and are spaced every 3 inches

#### PREMIER®

| Item No.   | Mfg. Part No.  | Description  |
|------------|----------------|--|
| 7321877500 | PT-BBR-EW-25   | Bond Braid #6 with Eyelets and Web 25-Feet/Reel, 2030              |
| 7321577500 | PT-BBR-E-25    | Bond Braid #6 with Eyelets 25-Feet/Reel, 2025                      |
| 0000367161 | PT-BBR-UESW-25 | Bond Braid #6 with Eyelets and Web Ultrabond 25-Feet/Reel, 2051    |
| 7328477500 | PT-BBR-UEW-25  | Bond Braid #6 with Eyelets and Web Ultrabond II 25-Feet/Reel, 2081 |



Ground Strap

### Ground Strap

- Equivalent to No. 6 AWG
- Tinned Copper
- 1/4" diameter mounting holes every 4"
- Clear Green Insulation
- 25' per roll

#### PREMIER®

| Item No.   | Mfg. Part No. | Description  |
|------------|---------------|--|
| 0000193805 | PT-MBR6GRN-25 | Ground Strap Rope with Insulation and Mounting Holes |

# Bonding Braids



Bond Bar with Tubing


## Bond Bar

Bond Bar is typically used in applications that require effective shield continuity and a dependable mechanical bond. It is constructed of a solid copper, tin-plated strip and has a hole pattern that conforms to standard 3 and 6 pair terminal blocks and variably placed bond studs. Insulator tubing is available for protection against environmental electrical and mechanical damage.

- Equivalent to No.6 AWG
- Tin plated copper
- 1/2 inch width
- 13/64 inch holes - slots 1/4 inch center 13/64 inch radius

**PREMIER®**

| Item No.   | Mfg. Part No. | Description  |
|------------|---------------|--|
| 7321597500 | PT-BBA-T-25   | Bond Bar #6 with Insulator Tubing 25-Feet/Reel, 4422 |

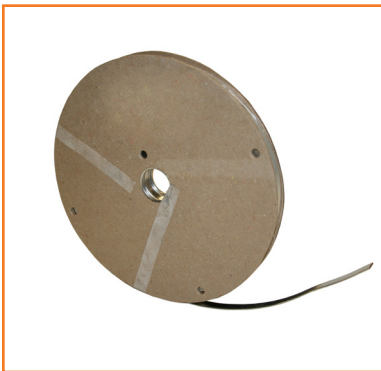

Bonding Ribbon Plain, 5 lb Spool

## Plain Bonding Ribbon

- Soft temper, flat wire for easy installation
- Solid wire for entering and exiting airtight applications
- Tin plated for solderability and corrosion resistance
- 3/8 inch wide x 0.051 inch thick
- 5-lb. spool

**PREMIER**

| Item No.   | Mfg. Part No. | Description                      |
|------------|---------------|----------------------------------|
| 7391617500 | PT-EM6868     | Bonding Ribbon Plain, 5 lb Spool |

600 New Century Parkway  
 New Century, Kansas 66031-8000  
 1.800.755.1950  
[dependonpremier.com](http://dependonpremier.com)